
Q1032. - Salim Habib // 71900130

Rony Chiha
4-8 Harley Crescent
Condell Park
NSW 2200
P: +96170619421 M: +96171727274

Quote Number: Q1032.

Quote Valid for 30 days

Building Type: Residential

Quote Date: 7/09/2020

Geitaoui

This apartment has been damaged by “Beirut Explosion” on the 4th of August 2020.

Steps of Hope in collaboration with A-Tech Australia took the initiative to help in the renovation of damaged houses, to get people back to their homes before winter comes.

Apartment damages survey:

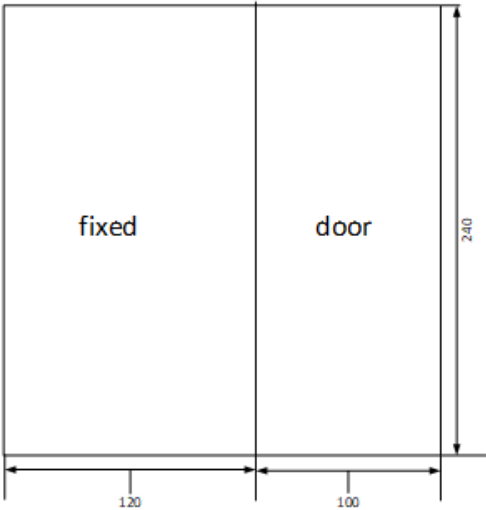
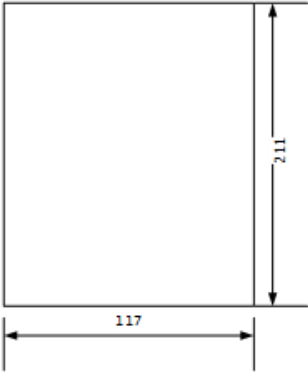
- Maintenance and assembly for the aluminum panel must be done and then the glass can be installed.
- Take action soon so we can proceed
- After the reparation we need the exact measurements
- The steel Garage is heavily damaged and out of its place.
- It needs a blacksmith to inspect and fix it.
- After that the dimensions of the cutting for the panel may be taken and fixed.
- Also the aluminum panel is destroyed.



Specifications and Inclusions

Materials

- Steel Accesories + Repairs

Description	Dimensions (cm)	Quantity	Notes
Steel Garage			Needs a blacksmith
Aluminum door panel (entrance)	 <p>A diagram of a rectangular aluminum door panel. The panel is divided into two vertical sections: a 'fixed' section on the left and a 'door' section on the right. Dimension lines indicate the following measurements: the fixed section is 120 cm wide, the door section is 100 cm wide, and the total height of the panel is 240 cm.</p>	1	Not for cutting (it's an approximate measurement)
Glass	 <p>A diagram of a rectangular glass panel. Dimension lines indicate the following measurements: the width is 117 cm and the height is 211 cm.</p>		Ready for cutting. White, 6mm. Maintenance and assembly for the aluminum panel must be done and then the glass can be installed.

Q1032. - Salim Habib // 71900130

Estimate

Customer:

Rony Chiha
 4-8 Harley Crescent
 Condell Park
 NSW 2200
 Ph: +96170619421
 Email: help@sohope.org.au

Estimate Details:

Net Total: \$782.50
 Markup: \$0.00 (0%)
 Tax: \$0.00
Estimate Total: \$782.50

Building Type: Residential
 Date Prepared: 27/08/2020

Cost Items				
Code	Description	Units / UOM	Unit Cost	Total
1	Glass			\$587.50
1.1	Glass Entry Door	5.500 m2	\$100.00	\$550.00
1.2	6mm Clear Glass	2.500 m2	\$15.00	\$37.50
	6mm Clear Glass	2.500 m2	\$15.00	
2	Materials			\$100.00
2.1	Steel Accesories + Repairs	1.000 quantity	\$100.00	\$100.00
3	Labor			\$95.00
3.1	Blacksmith	1.000 Day	\$40.00	\$40.00
	Blacksmith	1.000 Day	\$40.00	
3.2	Professional Installer	1.000 Day	\$55.00	\$55.00
	Professional Installer	1.000 Day	\$55.00	

Net Total: \$782.50
 Markup: \$0.00
 Tax: \$0.00
Estimate Total: \$782.50

